





# HOONVED

PEOPLE • PASSION • INNOVATION

## HB

Lavaceste a traino  
*Basket washers*

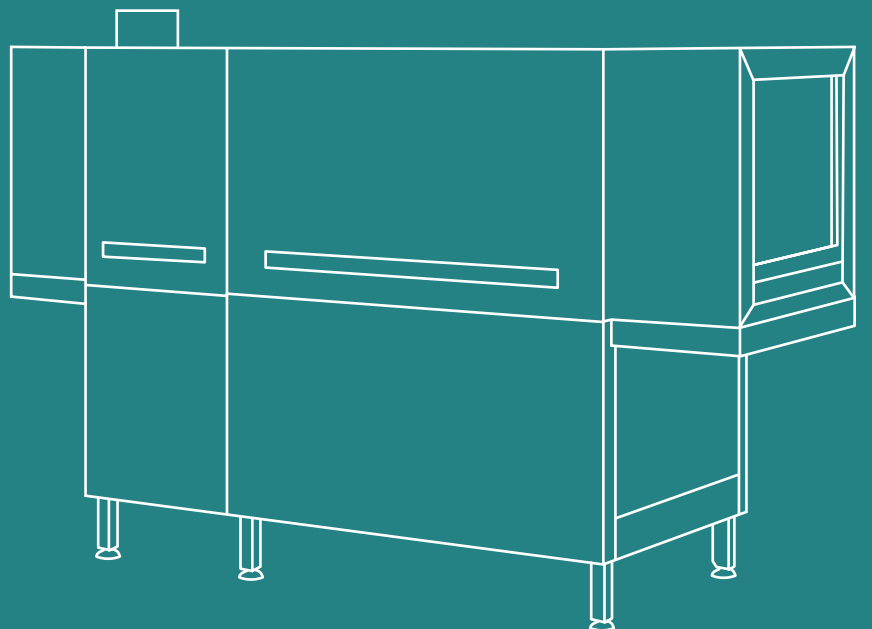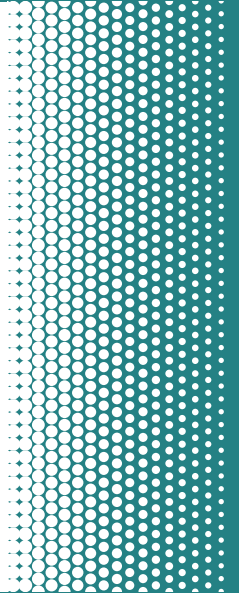

IT  
EN

## Serie HB

### HB Series

#### Lavaceste a traino

#### Basket washers

#### Ideali per / Suitable for



Panetterie  
*Bakeries*



Ristorazione Collettiva  
*Institutional Catering*



Ospedali  
*Hospitals*



Marine  
*Marine*



Industrie Alimentari  
*Food Industry*



Grande Distribuzione  
*Large Scale Retail Trade*

#### Performance / Performance



Da **100 ceste** fino a **270 ceste/ora**  
*From 100 baskets to 270 baskets/hour*




**4 modelli:**  
HBA - HB2A  
HBC - HB2C  
**4 models:**  
HBA - HB2A  
HBC - HB2C

## Grande produttività all'insegna della sostenibilità

La serie HB comprende ben 4 modelli di macchine a cesto trainato ad elevate prestazioni. Grazie alla loro grande produttività, combinata agli eccellenti risparmi energetici ed idrici garantiti da numerose innovazioni tecnologicamente eco, sono la soluzione perfetta per le importanti esigenze di lavaggio della ristorazione collettiva.

## High productivity in the spirit of sustainability


The HB range consists of 4 conveyor models with high performances. Thanks to their big productivity, combined to excellent energy and water saving, together with several eco technologies, these are the best solution for the most important washing requirements in the institutional catering field.

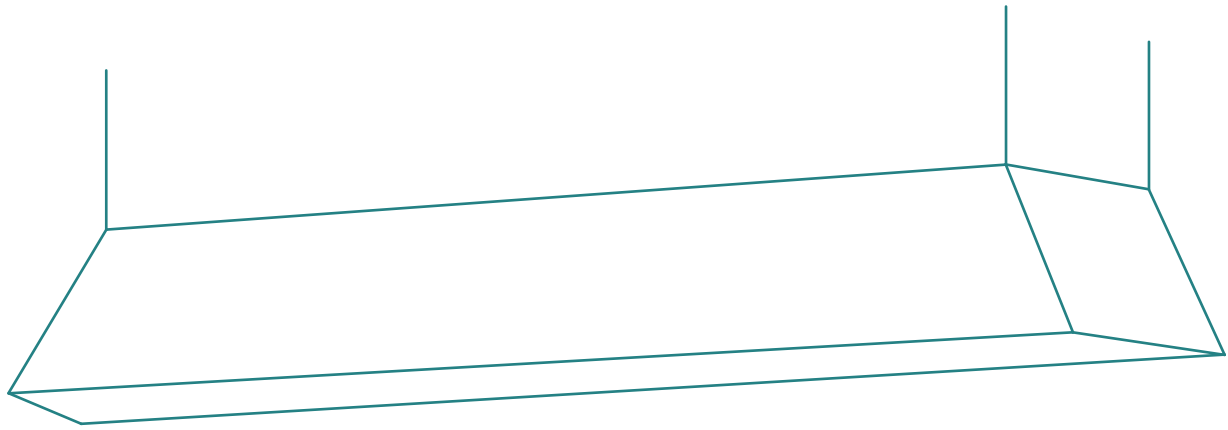

HB2A

4

Serie HB | *HB series*  
Lavaceste a traino | *Basket washers*



## Efficienza & flessibilità

- Due velocità standard
- Pompe auto svuotanti
- Alta produttività
- Avanzamento cesti mediante barra centrale

## Efficiency & flexibility

- *Two standard speeds*
- *Self-draining pumps*
- *High productivity*
- *Racks moving through central driving bar*




## Ergonomia & Robustezza

- Dimensioni compatte
- Telaio e pannellatura in acciaio inox 304 satinato
- Porte doppia parete controbilanciate
- Porte d'ispezione con molle di bilanciamento

## Strong and easy to use

- *Compact dimensions*
- *Inox AISI 304 stainless steel tank and structure*
- *Counterbalanced double wall doors*
- *Inspection doors with balancing springs*

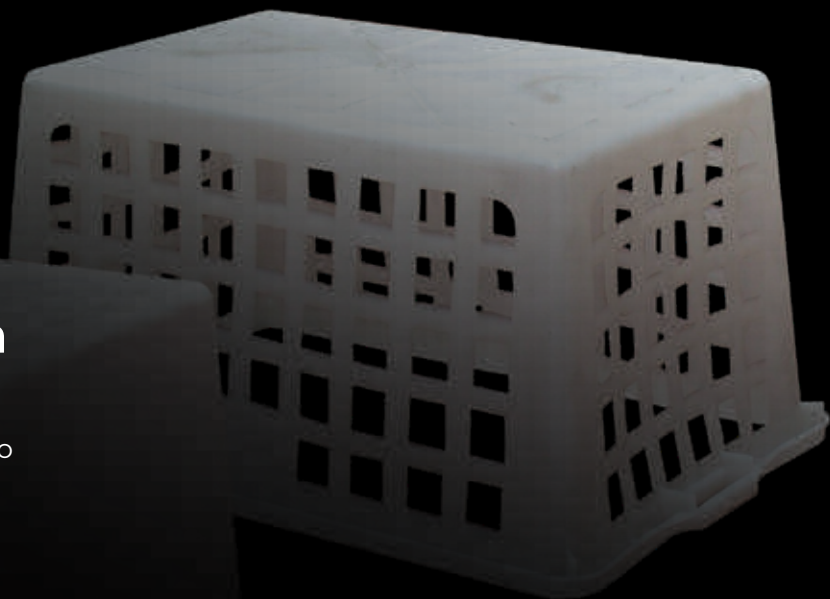



## Igiene perfetta

- Vasche stampate con spigoli arrotondati
- Auto-pulizia della porta con pattino a scorrimento
- Pompe auto-svuotanti per evitare il deposito di sporco

## Perfect hygiene

- Tanks with rounded corners
- Self-cleaning of the door through a special wipe seal
- Self-draining pumps to avoid the deposit of water dirtiness



## Elettronica all'avanguardia

- Pannello comandi elettronico
- Visualizzazione delle temperature su display digitale
- Hoonved Full Control Industria 4.0: questa tecnologia, attraverso il controllo da remoto di consumi d'acqua, energia e detergente, garantisce un uso consapevole delle risorse ambientali

## Advanced electronics

- *Electronic control panel*
- *Temperatures on digital display*
- *Hoonved Full Control Industry 4.0: this technology, through the remote control of water, energy and detergent consumption, guarantees a conscious use of environmental resources!*




## Modelli HB

### Models HB

#### HBA



ceste forate  
open baskets




- 100 ceste/h - baskets/h\*
- 150 ceste/h - baskets/h\*
- 1950x800x1450 (h) mm  
(2000 mm porta aperta - open door)

#### HB2A



ceste forate  
open baskets

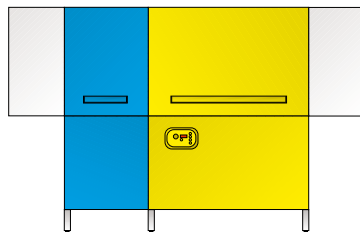


- 180 ceste/h - baskets/h\*
- 270 ceste/h - baskets/h\*
- 2550x800x1450 (h) mm  
(2000 mm porta aperta - open door)

#### HBC



ceste chiuse  
closed baskets




- 100 ceste/h - baskets/h\*
- 150 ceste/h - baskets/h\*
- 2350x800x1450 (h) mm  
(2000 mm porta aperta - open door)

#### HB2C



ceste chiuse  
closed baskets

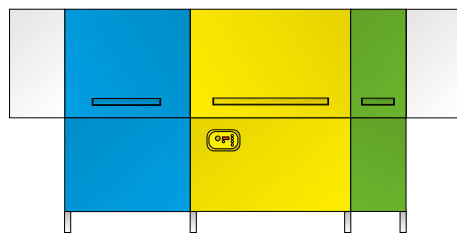


- 180 ceste/h - baskets/h\*
- 270 ceste/h - baskets/h\*
- 3250x800x1450 (h) mm  
(2000 mm porta aperta - open door)



\* Ceste 400x600 / Baskets 400x600

#### Moduli HB

##### Units HB

- Paraspruzzi/Splash guard
- Prelavaggio/Prewash
- Lavaggio/Wash
- Risciacquo/Rinse + HPRS



Modello / Model		HBA	HB2A	HBC	HB2C
Allacciamento elettrico / Voltage		400 V-3 N-50 Hz - Voltaggio speciale su richiesta / Special voltage on demand			
Dimensioni / Dimensions	mm	1950 x 800	2550 x 800	2350 x 800	3250 x 800
H macchina / Machine height	mm	1450	1450	1450	1450
Apertura / Clearance	mm	500 x 430 (h)	500 x 430 (h)	500 x 430 (h)	500 x 430 (h)
<b>Produzione ceste* / ora - Baskets* output / hour</b>					
1ª velocità / 1 <sup>st</sup> speed	ceste/h	100	180	100	180
2ª velocità / 2 <sup>nd</sup> speed	ceste/h	150	270	150	270
<b>Paraspruzzi in ingresso / Inlet splash guard</b>	mm	400	400	400	400
<b>Prelavaggio / Prewashing</b>	mm	-	600	-	900
Capacità vasca / Tank capacity	l	-	45	-	80
Potenza pompa / Pump power	kW	-	0,9	-	1,24
<b>Lavaggio / Wash</b>	mm	1150	1150	1150	1150
Capacità vasca / Tank capacity	l	80	80	80	80
Potenza pompa / Pump power	kW	1,24	1,24	1,24	1,24
Riscaldam. vasca / Tank heating element	kW	10	10	10	10
<b>Risciacquo / Rinse</b>	mm	-	-	400	400
<b>HPRS</b>		-	-	Standard	Standard
Acqua lt/h - Water lt/hour	l/h	250	350	165 (HPRS) - 250	230 (HPRS) - 350
Riscaldamento boiler / Boiler heating	kW	10	14	10	14
<b>Paraspruzzi in uscita / Outlet splash guard</b>	mm	400	400	400	400
<b>Carico totale vasche / Total tanks capacity</b>	l	80	125	80	160
<b>Traino / Drive motor</b>	kW	0,18	0,18	0,18	0,18
<b>Potenza totale / Total power (acqua-water 55°C)</b>					
Standard	kW	21,5	26,5	21,5	26,8
Con asciugatura / With drying section	kW	27,9	32,8	27,9	33,2
<b>Potenza totale / Total power (acqua-water 15°C)</b>					
Con boiler potenziato / With powered boiler	kW	35,5	42,4	35,5	42,8
Con recuperatore / With recovery unit	kW	24	30,5	24	30,8
Con asciugatura+rec. / With drying+recovery unit	kW	30,4	36,9	30,4	37,2

\* Ceste 400x600 / Baskets 400x600

Si consiglia il collegamento con acqua depurata fra 4°-10° F (gradi durezza francese). In presenza di durezza superiori, occorre l'utilizzo di un addolcitore. Il fabbricante si riserva il diritto di variare i dati senza preavviso.

We recommend mains water supply between 4°-10° Fr (French hardness degrees). A water softener must be used if the water is harder. The company reserves the right to modify the data without notice.

# HOONVED

PEOPLE · PASSION · INNOVATION

HOONVED Ali Group S.r.l. a Socio Unico  
Via Ugo Foscolo, 1 - 21040 Venegono Superiore (VA) - Italy  
P +39 0331 856111 · Fax +39 0331 865223 · P. IVA 10123720962  
[www.hoonved.com](http://www.hoonved.com) ·  



Certified Quality Management  
System UNI EN ISO 9001:2015



cod. 39220 - Ed. 03/2021 - Arti Grafiche Alpine

an Ali Group Company



The Spirit of Excellence